

## **STARK HK 3600 HD -ROCK SPREADER**

- Efficient and versatile gravel spreader for professional use
- Robust structure with high quality components ensure durability of the product
- Perfect for crushing plants, mines and other larger construction sites with heavier vehicles
- Easy to do maintenance and lubrication enables efficient gravel and rock spreading operation




- The wide range of STARK -spreader buckets are designed for 2 to 25 tons of chassis.
- The STARK HK 3600 HD is specially made for spreading gravel and rocks (8-32 mm).
- Due to the sealed structure of the spreading axle, sand spreading can be done too (3-8 mm).
- 4.3 m<sup>3</sup> SAE (3,6 m<sup>3</sup> water volume). Strong (315 cm<sup>3</sup>) hydraulic motor
- Standard accessories includes double pressure relief valve, flow control valve, crusher shaft, spreader bar shields and a lip plate of 500 HB.
- Quick, safe and easy to do bearing greasing, chains lubrication and adjustment without opening the protective cover.
- The spiral pattern of the spreader shaft and the stepless hydraulic rotation speed control allow accurate gravel spreading thus saving materials.
- The robust structure and functionality of the bucket is based on features like stiffener beams, high strength structural steel (10mm scantling), smooth inner surface of the bucket and high-quality welded and finished seams.
- The design of the discharge opening allows sealed shaft structure, prevents the shaft from jamming and reduces wear on the sealing rubber.

**PRECISE  
SPREAD**

- Accessories: Volvo BM or Volvo 150 welded fittings



*STARK –attachments have been manufactured for over 40 years*

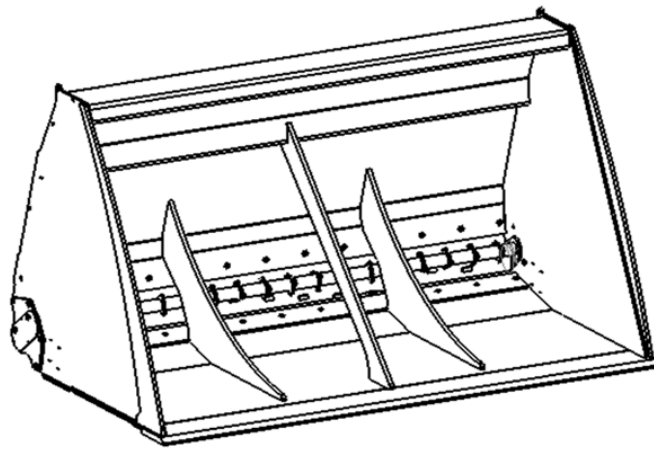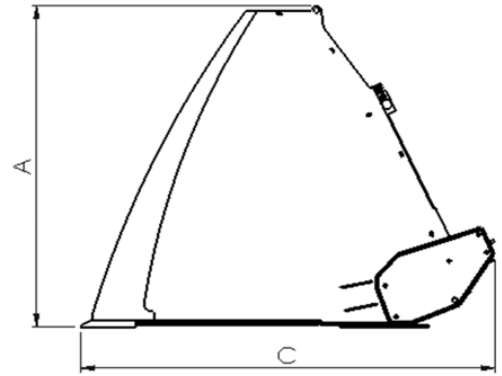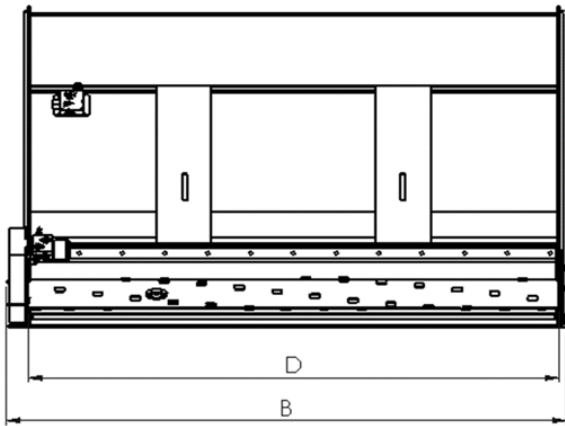

Product	Bucket height (mm)	Bucket width (mm)	Bucket depth (mm)	Spreading width (mm)	bucket water volume (m3)	Bucket SAE HEAP volume (m3)	Weight (kg)
	A	B	C	D			
HK 3600 HD	1550	2550	1890	2430	3,7	4,2	1800

*\*\*Weight includes the fittings. Note! Weight may vary depending on fitting type*