




STARK -RELAX ARTICULATED PLOW


- Patented RELAX blade release system protects the operator, base machine and work tool
- Safest and most versatile articulated plow on the market
- Professional's choice for plowing yards and roads

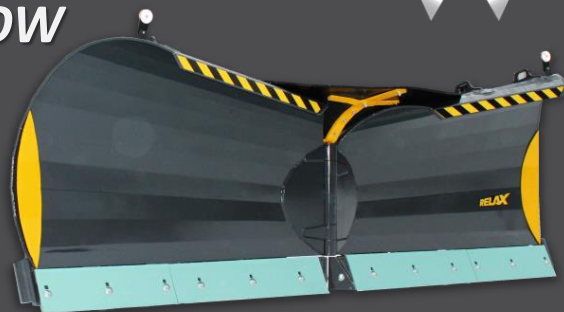





- With STARK RELAX articulated plow, you can plow roads, pavements, forest roads and yard areas
- Thanks to its patented blade release system, the plow is also suitable for removing packed snow and ice
- Strong structure and high quality components ensure trouble-free miles of plowing
- Thanks to its curved wing and 25° blade angle, STARK RELAX articulated plow has excellent plowing capability and is light to push
- Thanks to the 38° rotation angle, snow rises on the wing at speeds of 20 km/h, and the plow's snow throwing capability is therefore superior
- Thanks to the advanced degree of flotation, the plowing result is excellent
- Flotation does not need greasing
- Bolt-on edge wear pads allow plowing against curbstones without damaging the plow. Standard blades can be used on the plow
- Bolt-on STARK FIT fittings can be changed quickly to match the base machine's fitting
- There is a wide range of hydraulic options available for STARK plows. For example, a 4-way valve will provide RELAX articulated plow additional user convenience and working efficiency



- Accessories: numerous blade options, LED series, road gear package snow rubber for front edge of the wing, customized paint finish, support wheels, a number of different valve options, central lubrication system

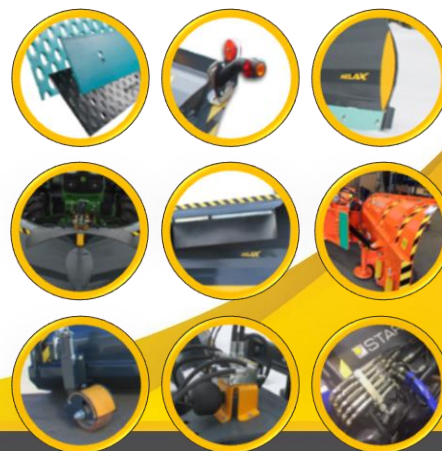

STARK attachments have been manufactured for over 40 years

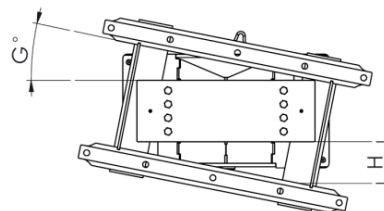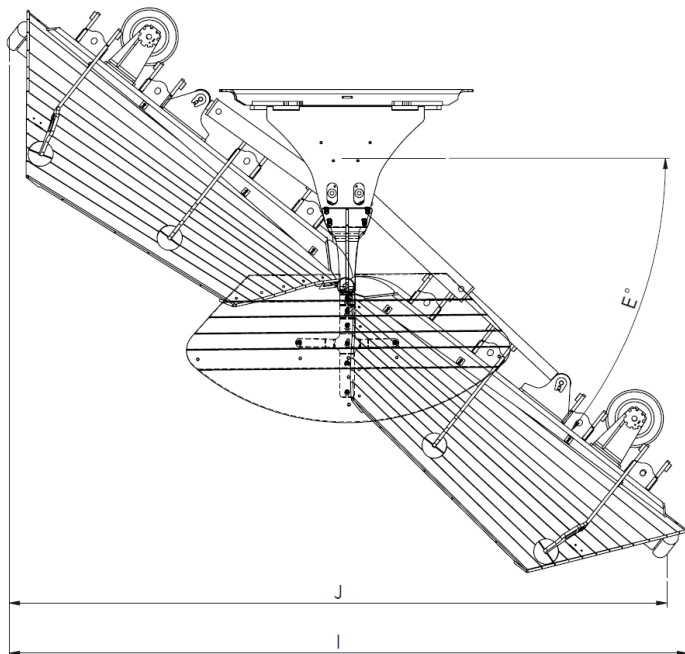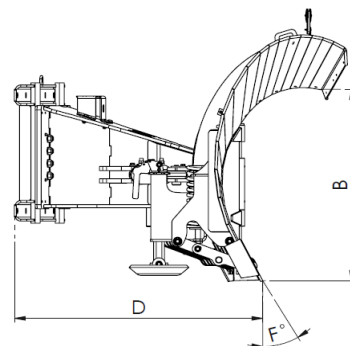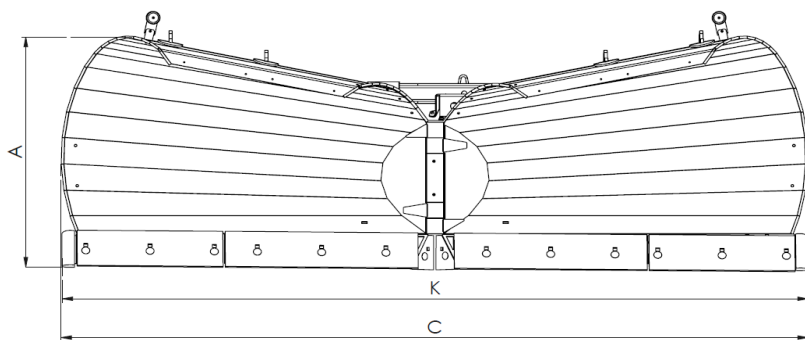

Product	Wing max. height (mm)	Wing min. height (mm)	Wing width (mm)	Distance from fitting (mm)	Turning angle \pm (°)	Blade angle (°)	Flotation (°)	Flotation height (mm)	Min. width with turning angle (mm)	Min. working width for turning angle (mm)	Blade length (mm)	Weight (kg) *
	A	B	C	D	E	F	G	H	I	J	K	
NL 3300 R	1165	920	3300	1050	38	25	12	190	2700	2600	3295	1210
NL 3600 R	1200	920	3550	1060	38	25	12	190	2890	2795	3530	1260
NL 4000 R	1220	920	4000	1090	38	25	12	190	3270	3120	3985	1335

* Weight includes blades and fittings. Weight depends on the fitting/plow accessories