



## STARK U-PLOWS, H-MODELS


- The plows are suitable for over 10 tons base machines
- Thanks to patented technologies, STARK U-plow is the most versatile and efficient on the market



- The ACS blade system protect the driver, base machine and plow from damage in collision because each single blade plate dodges obstacles.
  - Patented SMOOTH MOTION -wing turning system with two hydraulic cylinders enable extremely precise, controlled and wide range of motion. The plow is easy to use and work result is excellent.
  - STARK U-plow provides unique maneuverability of snow. Snow can also be collected by reversing with the U-plow. Plowing snow on the embankment is efficient and effortless.
  - FLOATING FRAME closely follows the ground. The sliding plates and the positioning of the flotation reduce bouncing of the plow while working.
  - Multiple hydraulic solutions are available for STARK U-plows. For example, four function valve increases the ease of operation and efficiency.
- 
- Standard equipment: ACS blade system, SMOOTH MOTION, FLOATING FRAME - technologies, adjustable support legs, rotating support plates, edge wear pads, reflectors, hazard taping.
  - Accessories: multiple blade options, Led lights set, support wheels, custom paint, multiple valve options, central lubrication system, control unit.



*STARK attachments have been manufactured for over 40 years*

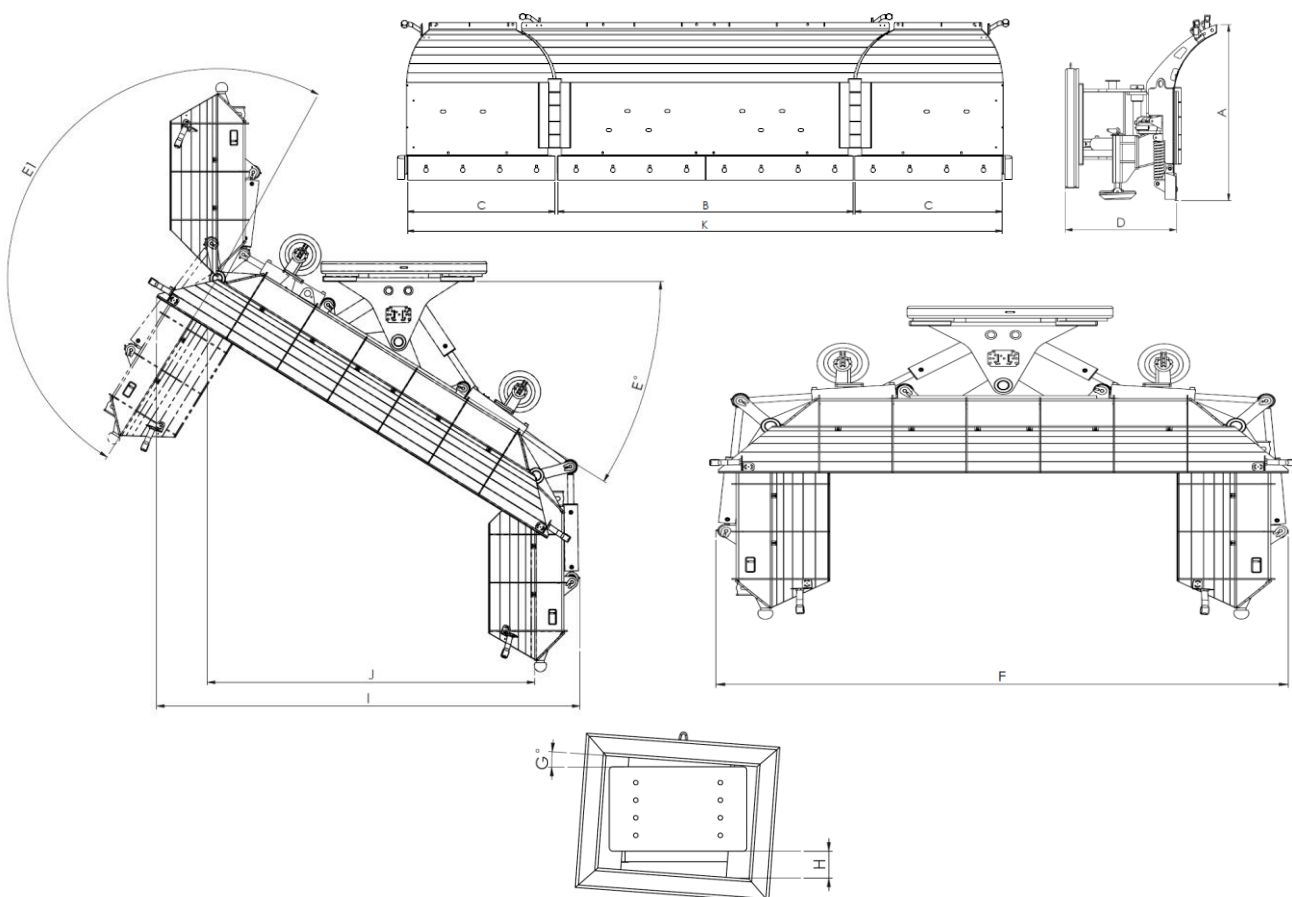

Product	Wing max. height (mm)	Centre section width (mm)	Wing width (mm)	Distance from fitting (mm)	Turning angle $\pm$ (°)	Turning angle of wings (°)	Wing width in U-formation (mm)	Tilt angle (°)	Flotation height (mm)	Min. width with turning angle (mm)	Min. working width for turning angle (mm)	Cleaning width (mm)	Weight (kg) *
	A	B	C	D	E	E1	F	G	H	I	J	K	
UA 4200/2400 H	1350	2400	900	950	32	180	3100	7	150	2830	2160	4330	1750
UA 4800/2400 H	1350	2400	1200	950	32	180	3100	7	150	2850	2160	4930	1890
UA 5400/2400 H	1350	2400	1500	950	32	180	3100	7	150	2850	2160	5550	1920
UA 4800/3000 H	1350	3000	900	950	32	180	3700	7	150	3400	2680	4950	1890
UA 5400/3000 H	1350	3000	1200	950	32	180	3700	7	150	3400	2680	5550	1920
UA 6000/3000 H	1350	3000	1500	950	32	180	3700	7	150	3400	2680	6150	1950
UA 6600/3000 H	1350	3000	1800	950	32	180	3700	7	150	3400	2680	6750	2350

\* Weight includes blades and fittings. Weight depends on the fitting type/plow accessories