

# STARK®

**STRONG, STRONGER, STARK**



## STARK RELAX U-PLOW


- Suitable for 3-10 tons base machines
- Patented technologies make STARK U-plows the most efficient and versatile



- The RELAX blade system keeps blades locked resulting in smooth plow trace and considerably less formation of packed snow.
  - Patented SMOOTH MOTION wing turning system with two hydraulic cylinders enable extremely precise, controlled and wide range of motion. The plow is easy to use and work result is excellent.
  - STARK U-plow provides unique maneuverability of snow. Snow can also be collected by reversing with the U-plow. Plowing snow on the embankment is efficient and effortless.
  - FLOATING FRAME closely follows the ground. The sliding plates and the positioning of the flotation reduce bouncing of the plow while working.
  - STARK FIT tool attachment system enables quick change between different base machines.
  - Multiple hydraulic solutions are available for STARK U-plows. For example, four function valve increases the ease of operation and efficiency.
- 
- Standard equipment: RELAX blade system, SMOOTH MOTION, FLOATING FRAME and STARK FIT technologies, adjustable support legs, rotating support plates, edge wear pads, reflectors, hazard taping
  - Accessories: multiple blade options, Led lights set, custom paint, multiple valve options, central lubrication system, control unit



*STARK attachments have been manufactured for over 40 years*

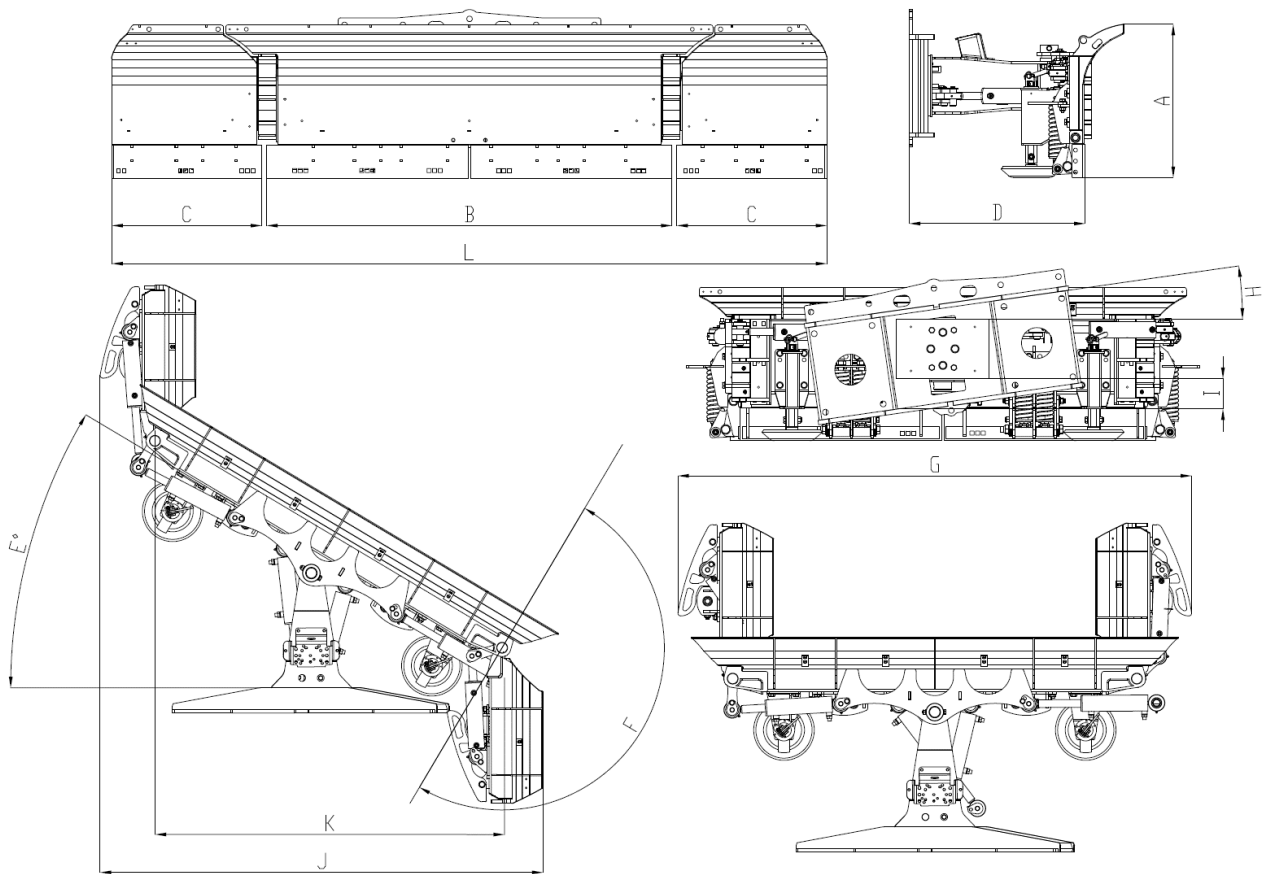

Product	Wing max. height (mm)	Centre section width (mm)	Wing width (mm)	Distance from fitting (mm)	Turning angle $\pm$ (°)	Wings turning angle (°)	Width in U-formation (mm)	Flotation (°)	Flotation height (mm)	Max. width with turning angle (mm)	Min. working width for turning angle (mm)	Blade length (mm)	Weight (kg)*
	A	B	C	D	E	F	G	H	I	J	K	L	
UAR 2950/1500	700	1500	700	800	38	180	2030	8	150	1890	1200	2950	770
UAR 3250/1800	700	1800	700	800	38	180	2330	8	150	2010	1450	3250	820
UAR 3750/1800	900	1800	900	800	38	180	2350	8	150	2010	1470	3750	880
UAR 4200/2400	900	2400	900	760	38	180	2750	13	180	2350	1920	4325	1140
UAR 4800/2400	900	2400	1200	760	38	180	2750	13	180	2350	1920	4930	1220

\* Weight includes blades and fittings. Weight depends on the fittings type and the accessories.